


Specification

Watt	Input Voltage	Wavelength	Tube Type	Timer	LED CCT	LED Lumen	Dimension	Working Temperature (°C)	Color	
125W±10%	UVC 60W	100-277V 50-60Hz	254nm	UVC	1-9H	3000K	5200LM	1065*209*163mm	-10~35°C	Black/White
	LED 60W					4000K	5500LM			
	Other 5W					5000K	5200LM			


Features

- U19 product features: 1 - UVC safety protection

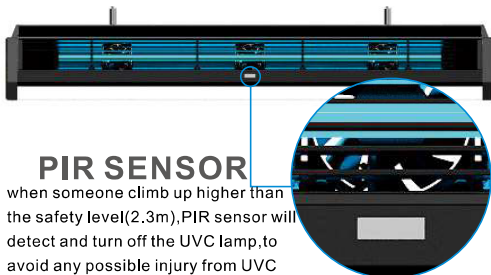

PIR SENSOR



when someone climb up higher than the safety level(2.3m),PIR sensor will detect and turn off the UVC lamp,to avoid any possible injury from UVC irradiance.

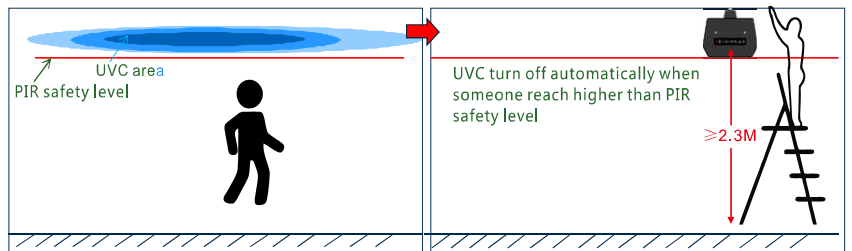

Features



● Feature 2 - UVC Irradiance

2 sides UVC upper room disinfection, to realize UVC disinfection in occupied area

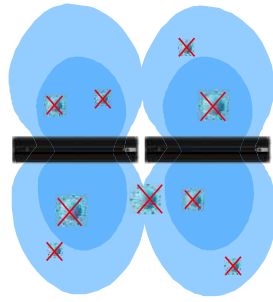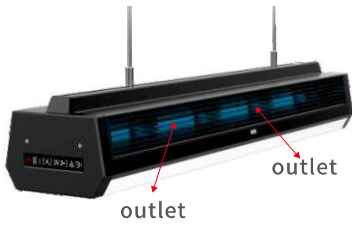

● Features 3 - Air flow system

Built-in fan for more air flow, to increase the air disinfection efficiency.

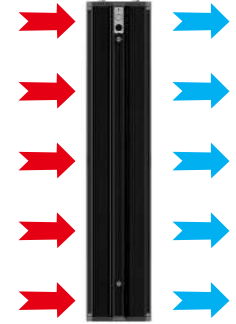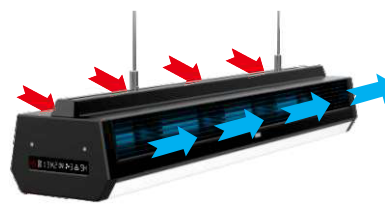

● Features 4 - LED lighting


LED lighting brightness has 1-5 setting steps (20%/40%/60%/80%/100%); and 1-3 CCT setting steps (3000k/4000k/5000k)




Flux out: 181.7 lm

Height	Flux, lxmax	Angle: 55.63deg	Diameter
1m	204.6, 573.11x		105.52cm
2m	51.15, 143.31x		211.04cm
3m	22.73, 63.67lx		316.56cm
4m	12.79, 35.82lx		422.08cm
5m	8.184, 22.92lx		527.60cm
6m	5.683, 15.92lx		633.11cm
7m	4.176, 11.70lx		738.63cm
8m	3.197, 8.954lx		844.15cm
9m	2.526, 7.075lx		949.67cm
10m	2.046, 5.731lx		1055.19cm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

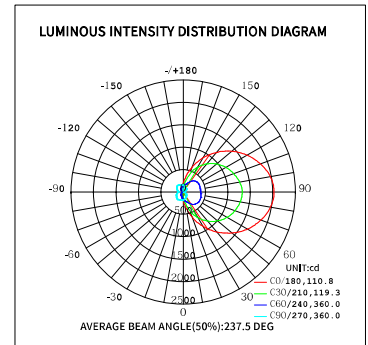

● Features 5 - Digital display, remote control.

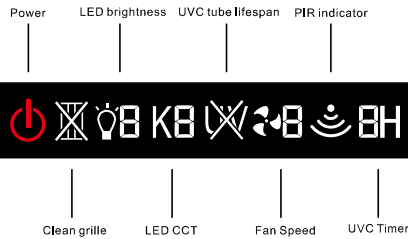

1. Press "ON/OFF" to turn on or off LED light;
2. Press "L+" "L-" to change LED brightness;
3. Press "K+" "K-", to change LED CCT.

ON key to turn on the light
OFF key to turn off the light

"ON/OFF" key, to turn on/off the fan and UVC, "F+" "F-" to change the fan speed.

"T+" "T-" key, turn on & off the UV timer, basic timer is 1H. Press "T+" "T-" to change the time setting.




Remind: when connected to power, indicator will be RED, other time it will be white.

Application




Installation

Telescopic pole installation

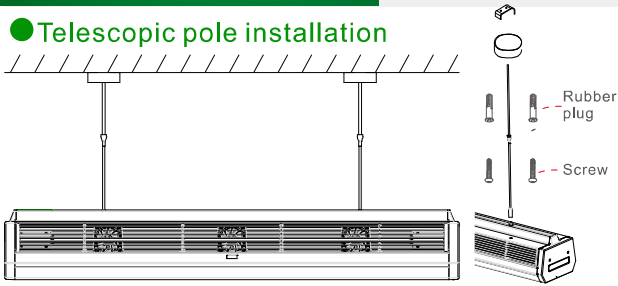


Hanging rope installation

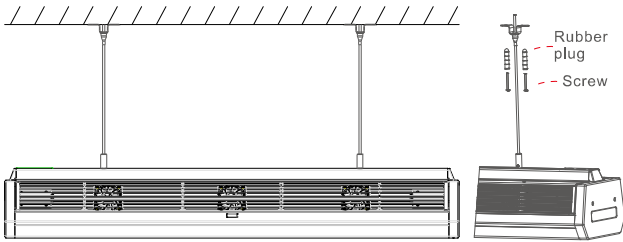


Change the tube


1. Remove the 2 screws on the display side;

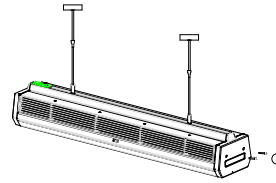


2. Open the grille fence

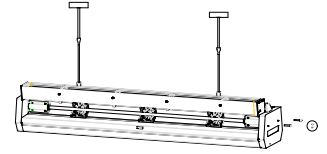


3. Take down the tube protector by removing the screw

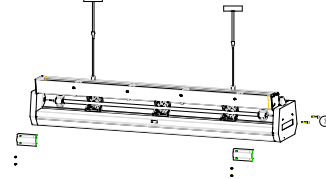

4. Replace the tube

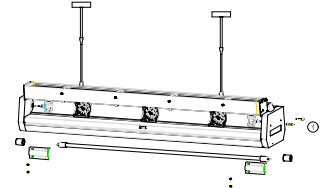

Dimensions

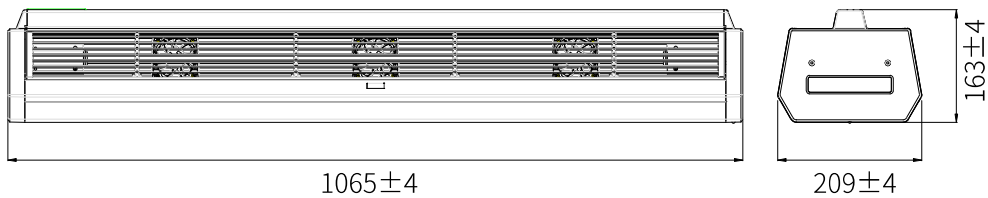


(unit:mm)


Packing

Model	NW(kg) (lbs=kgx2.2)	GW (kg) (lbs=kgx2.2)	Carton Size (mm) (x0.0393=inch)
CELEXBLUVCD-06	12.5KG	14.1KG	1121*261.5*239mm

Packing details

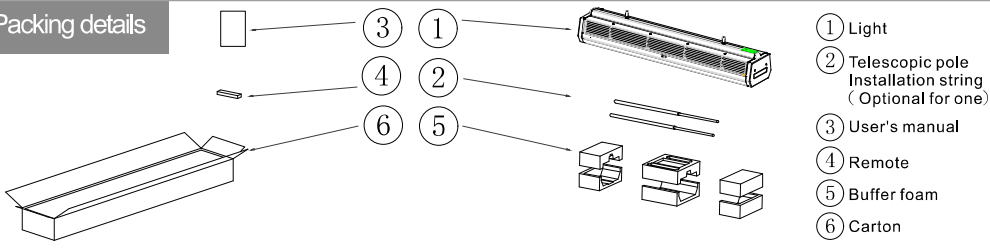

- ① Light
- ② Telescopic pole
Installation string
(Optional for one)
- ③ User's manual
- ④ Remote
- ⑤ Buffer foam
- ⑥ Carton

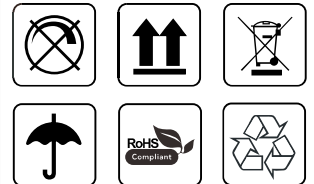

ordering part No

CE	BL	UVC	P	W
Brand name	Lighting Type	Series name	LED Power	Body color
CE: CELEX	LL: Batten Light	UVC	60W	Black White